

CITYSPOT®


CITY BOX 2250



SULO®

EFFICIENT, DURABLE, AND URBAN-READY WASTE CONTAINERS

City Box 2.250 L

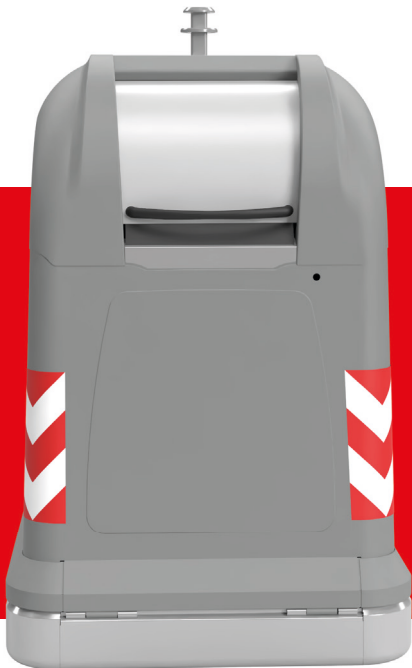

BILATERAL



VERTICAL



ACCESS
CONTROL



LEVEL
MEASUREMENT



PAY AS YOU
THROW

Designed for maximum efficiency and durability, our containers combine ease of use, advanced collection features, and customizable options to seamlessly integrate into any urban environment.

Ease of Use

- Low throw-in height (<1.200 mm) for all waste types.
- Optional hands-free convenience with pedal opening.

Optimized Collection Efficiency

- Smooth and secure emptying with Kinshofer lifting system.
- Rapid unloading with bottom flaps opening up to 87°.
- Leak-proof flaps hold leachate (>10% of nominal volume).

Superior Design and Durability

- Reinforced lifting system for reliability.
- Protected hinges ensure long-lasting functionality.
- Vertical side walls minimize waste build-up.

Customizable for Urban Needs

- Rounded, modern design fits urban aesthetics.
- Large surfaces for stickers or branding.
- Optional centering device and metallic bank for added stability.



LIFTING DEVICES

Kinshofer

SLOT SYSTEMS*

Glass
Ø 260 mm
RAL 6018



Bio waste
490 x 380 mm
RAL 2008



Residual waste
490 x 380 mm
RAL 7038

COLOURS


Body



RAL 7037

City Box 2.250 L

TECHNICAL SPECIFICATIONS

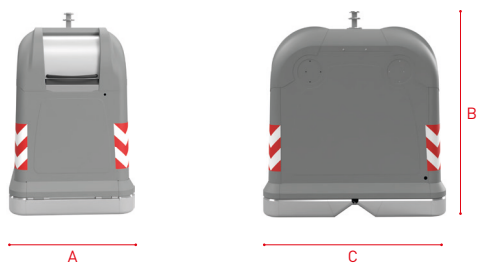

City Box 2.250 L


Dimensions ~ (mm)		Volumes	
A Width	1.100	Useful Volumes ~ (l)	2.050
B Height	1.620	Unloaded weight (kg)	250
C Depth	1.600	Leachate capacity ~ (l)	240

PEDAL & HANDLE



Pedal and ergonomic handle ensures easy, touch-free operation

ALIGNMENT GUIDE

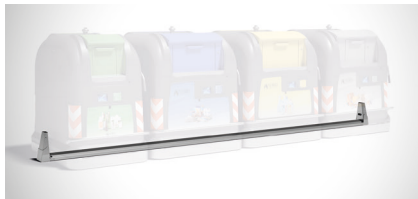


Keeps containers stable and correctly positioned

PERSONALISATION



White - Useful surface: W 661 x H 650 mm
Black - Sticker: W 610-640 x H 610-630 mm
Red: Side sticker

SOUNDPROOF



Soundproofing for glass collection containers

ACCESS CONTROL



Smart user interface & system connectivity

MECHANICAL KEY



Mechanical key access for service managers

CITY BOX

2250

TECHNICAL SPECIFICATIONS

Dimensions	Depth: 1.600 mm, Width: 1.100 mm, Height: 1.620 mm
Useful volumes	2.050 l
Empty weight	250 kg
Lifting device	Kinshofer

INSTALLATION

Transport	Unassembled 60 units per Container 40" High Cube Assembled 22 units
-----------	--

HANDLING, COMFORT AND FLEXIBILITY

Compactor	-
Accessability	▪ (glass, bio waste, residual waste)
Foot pedal	▪
Ergonomic Handle	▪
Sound-proofing	Sprayed polyurethane foam applied to the base and walls

EMPTYING

Number of operators	†
Duration of emptying	1-2 min
Cost of emptying	€

SERVICE

Pay as you throw billing	▪
Access control	▪
Level measurement	▪

FRACTIONS

Bio waste RAL 2008	Sliding door : 490 x 380 mm
Residual waste RAL 7038	Sliding door : 490 x 380 mm
Glass RAL 6018	Ø260 mm

STANDARDS

Certifications	NF EN 13071-1 & NF EN 13071-3
----------------	-------------------------------

sulo.com